

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
25 January 2001 (25.01.2001)

PCT

(10) International Publication Number
WO 01/05510 A1

- (51) International Patent Classification⁷: **B03C 1/28,**
C12Q 1/68
- (21) International Application Number: **PCT/EP00/06789**
- (22) International Filing Date: **14 July 2000 (14.07.2000)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
99202354.9 **19 July 1999 (19.07.1999) EP**
- (71) Applicant (for all designated States except US): **AKZO NOBEL N.V. [NL/NL]; Velperweg 76, NL-6824 BM Arnhem (NL).**
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **KREUWEL,**
- Hermanus, Johannes, Maria [NL/NL]; Vivaldistraat 10, NL-5481 LW Schijndel (NL). VERWIMP, Emiel, Gerebern, Maria [BE/BE]; Reigerstraat 22, B-2440 Geel (BE).
- (74) Agent: **VAN GENT, M.; P.O. Box 20, NL-5340 BH Oss (NL).**
- (81) Designated States (national): **AU, CA, ID, JP, KR, US, ZA.**
- (84) Designated States (regional): **European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).**
- Published:
— With international search report.
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **DEVICE AND METHOD FOR MIXING MAGNETIC PARTICLES WITH A FLUID**

(57) Abstract: This invention relates to the use of magnetic or magnetizable particles, and, in particular, to methods of mixing magnetic or (super)paramagnetic particles efficiently with a fluid and the separation of the magnetic particles from a fluid, optionally followed by resuspension of the particles in another fluid. The present invention provides a method of mixing, in one or more container(s), magnetic or (super)paramagnetic particles with a fluid, using more than one magnets, whereby the containers are subjected to magnetic fields with different and changing directions by moving the magnets with respect to the position of the container(s) and/or by moving the containers with respect to the positions of the magnets. The invention further provided a device for doing the same. Preferably the holders for the containers and the magnets in the device are placed in intervening array geometries and the magnets are placed in line in such a way that all magnets that are in line have their poles oriented in the same direction, and that all magnets in a neighboring line have their poles oriented in the reverse direction with respect to the poles of the magnets in the first line.

Device and method for mixing magnetic particals with a fluid

5 This invention relates to the use of magnetic or magnetizable particles, and, in particular, to methods of mixing magnetic or (super) paramagnetic particles efficiently with a fluid and the separation of the magnetic particles from a fluid, optionally followed by resuspension of the particles in another fluid.
The invention further provided a device for doing the same.

10 Magnetic particles are often used in separation processes. There are many biological assay methods and purification methods in which magnetic particles are used. For example, immuno assay methods, nucleic acid hybridization assays and the like. Magnetic particles can also be used in purification methods, to isolate particular
15 components, proteins, nucleic acids, from the material in which they were contained. The particles can be used to separate certain components from a mixture, for example, because they are coated with a reagent with a specific affinity for the component. Magnetic particles can be drawn to, for example, the wall of a container in which the fluid with the magnetic particles was contained and the fluid can be removed and, optionally,
20 be replaced with another fluid. Thus, the particles can be mixed with the fluid from which the specific component is to be removed, the component will bind to the magnetic particle, and a magnet can be used to separate the particles with the component from the remainder of the mixture in the fluid. Optionally the magnetic particles can be washed, and can be separated in another fluid. Or the component can be removed from the
25 particles again into another fluid.

The use of magnetic particles for purifying a nucleic acid (NA) target from a biological sample is well known.

Purification methods for nucleic acid using magnetic particles have for example been
30 described in EP757106 (Toyobo) and WO 96/41811 (Boehringer Mannheim). In these applications methods are described wherein a sample solution containing nucleic acid is treated with a chaotropic substance to release the nucleic acid. After releasing the NA from the biological entity in the lysis buffer, the NA is bound to the magnetic particles. Both particles coated with a target-specific probe as well as particles having a metal oxide
35 coating (e.g. silica), giving a generic binding of all NA contained in the sample are used for this purpose. After binding the target, interfering components such as cell debris, enzymes, proteins anti-coagulants and salt are removed by washing the magnetic particles in a (set of) wash buffer(s). Finally, the purified NA is released from the particles by mixing the particles in a small volume of elution buffer. This process is called elution
40 since it is the nucleic acid that is eluted from the particles.

For efficient washing and elution the magnetic particles need to be well dispersed and mixed in the relevant buffers. In general, this washing and elution process may be

hampered by the aggregation or clogging of the magnetic particles either caused by the adsorption on the magnetic particles of specific components in the lysed sample (e.g. genomic DNA) or by residual magnetic dipole fields induced in the particles. In particular, the use of silica coated (magnetic) particles with samples that contain significant amounts of genomic DNA (whole blood, sputum, tissue), results in a tight pellet that is difficult to process.

Well-known methods for mixing (magnetic) beads in a liquid buffer are vortexing, sonification or pipetting. These methods however are difficult to automate, and/or give risk of sample to sample contamination by aerosol generation or they may degrade the NA target. Furthermore, these methods are not well suited for very small volumes of liquid (typically 0.01ml) as may be required for the elution process.

The method and device according to the invention are especially suitable for use with isolation procedures, where, usually an ingredient is to be isolated in rather pure form from a relatively large volume of sample fluid, and concentrated into a smaller volume of another fluid to be suitable for further use.

In the case of a method for the isolation of nucleic acid such further use may be a nucleic acid amplification method or an assay for the detection of nucleic acid or both.

A method and apparatus for separating and resuspending superparamagnetic particles is disclosed in WO 91/09308 (Diatec instruments).

In this application it was disclosed that superparamagnetic particles may be aggregated and resuspended by subsequent application of different magnetic fields. First and second applications of the magnetic field could be provided with the same magnet, which was then rotated around the container containing the particles to a different location. Two spaced opposed electromagnets, however, could also be used. These electromagnets were energized alternately to produce the first and second magnetic fields that keep the particles in suspension and mix them with the fluid in which they were contained.

A method for the separation of magnetic particles from a fluid is disclosed in US 3985649.

The particles may be separated from a fluid by bringing the particles into close proximity with a magnet and moved through the liquid along the wall of a container. They may even be moved out of the liquid in this way and can be transported to a second container.

In US4988618 a device is described for use with assays wherein multiple small volume samples are tested at the same time. These type of assay can be performed in, for example, microtiter plates. Magnetic microparticles are present in each well of the microtiter plate. The device thus has multiple orifices and the orifices are each surrounded by multiple permanent magnets, preferably four. The resulting structure of magnets and orifices is rigid; the magnets are not intended to be moved and are mounted in fixed relations with respect to themselves and to the base of the device. All magnets are aligned and the field orientation of the magnets may be such that all magnets have the same field direction or neighboring magnets have opposite field directions. The magnet orientation thus results in four spot attraction sites per orifice. The magnets are purely

meant for separation purposes. It is disclosed in the patent that the device may further comprise means or agitating the reagents within the containers.

5 The present invention relates to a method and device, which allows efficient mixing of magnetic or magnetizable particles in a fluid, and optionally separation of the particles from said fluid. Use is made of magnetic field of opposite and changing directions. It has been found that, when magnetic or magnetizable particles in a fluid are subjected to these magnetic fields, the particles are, under the influence of the field, efficiently contacted with the fluid. Such particles normally may tend to form a clot, which can prevent efficient

10 mixing with a fluid. It has been found that, by subjecting the container in which the fluid and the particles are comprised, to magnetic fields of different and changing directions, the particles are efficiently separated from each other and drawn through the fluid in such a way that a very efficient mixing process occurs. The method allows efficient mixing of particles with even very small fluid volumes. The method of the invention therefore has

15 the advantage that it may save in, for example, washing fluids and may allow the reduction of the volume of fluid needed. Thus, for example in isolation procedures, the method of the invention allows the purification of reagents in high concentrations. Besides, whereas prior art methods can be laborious and time consuming, the method is fast and easy to perform.

20 Thus, provided with the invention is a method of mixing, in one or more container(s), magnetic or (super)paramagnetic particles with a fluid, using more than one magnets, whereby the containers are subjected to magnetic fields with different and changing directions by moving the magnets with respect to the position of the container(s) and/or by moving the containers with respect to the positions of the magnets.

25 With "mixing" in this context is meant that the particles and the fluid are brought in close contact. Mixing thus, means "contacting" in a very efficient manner, such as when particles would be washed or reacted with components present in the fluid. Mixing, in this context, does not necessarily provide a homogeneous mixture after the process is finished. The particles may, when the magnets are removed, segregate to the bottom of

30 the container in which they are comprised or may be held to the wall of the container in a particular location by the magnets. The mixing process can for example be used to wash the particles or to react the particles with a component of the liquid, or to bind a component of the liquid to a reagent coated on the particles. Likewise, the mixing process may result in the elution of a certain component originally present on the particles into the surrounding liquid. The method of the invention is applicable in each of these processes

35 and provides an efficient rapid and convenient way of contacting magnetic or magnetizable particles with a volume of a certain fluid.

The present invention thus provides a generic method for mixing magnetic particles with a fluid almost independent of their level of pelleting/aggregation. The method further allows

40 releasing of reagents bound to the particles, for example nucleic acid, from the particles and concentration into a small volume. The method is easy to automate and well suited for high throughput formats. It minimizes the risk of contamination by droplets or aerosols.

During a washing (or elution) cycle the (aggregated) particles are dragged through the liquid from left to right by placing a first magnet close to the outside right wall of the vessel and subsequently withdraw this first magnet and simultaneously place a second magnet close to the opposite (left) wall of the vessel in order to drag the particles into the opposite direction. The present invention furthermore provides a device for performing said method.

The device according to the invention comprises means for holding the containers and more than one magnets and means for moving said magnets with respect to the position of said containers and/or means for moving said containers with respect to the position of said magnets in such a way that the containers are subjected to magnetic fields with different and changing directions.

Preferably the magnets are moved with respect to the containers.

The containers may have any convenient shape. Any vessel, suitable for holding a fluid sample in which magnetic particles are dispersed can be used. Preferably the vessels are suitable for holding small liquid samples. For example, they may be Eppendorf cups, PCR containers or micro-titer plate strips).

The magnets may be placed in different geometries with respect to the containers. Any geometry which allows the movement of the magnets with respect to the position of the containers or the other way around, and which will result in magnetic fields of different and changing polarity in each container can be used.

It was found that this washing (or elution) process become particular efficient with the two magnets arranged in such a way that they strongly repel each other (by facing each other with similar poles N-N or S-S). Due to this arrangement the magnetic field lines in the area in the vessel where the magnetic beads are located show a strong and sudden change in direction during each cycle. When the container is placed between two magnets that strongly repel each other because their similar poles are facing each other (N-N or S-S) the slightest movement of either one of the magnets or of the container with respect to each other will result in sudden strong changes of the magnetic field to which the particles in the container are subjected. It has been found that this results in a very efficient way of mixing the particles with the fluid, even when the particles as such tend to form a clot or had already formed a clot within the fluid.

The magnets are preferably arranged in such a way that each magnet repels each of its neighboring magnets.

The magnets may be placed in line in such a way that magnets of opposite polarities can be moved back and forth on straight parallel paths along opposite sites of each container in such a way that the direction of the magnetic field in each container is repeatedly reversed.

This may advantageously be achieved by placing the magnets in line in such a way that all magnets that are in line have their poles oriented in the same direction, and that all magnets in a neighboring line, that is on the other side of the containers next to the first line of magnets, have their poles oriented in the reverse direction with respect to the poles of the magnets in the first line.

When the magnets are moved, this may result in the containers being repeatedly placed between two magnets that face each other with the same pole.

The magnets and containers may be placed in parallel rows and the rows of magnets can be moved in opposite directions alongside the rows of containers.

5 But, of course, based on the basic concept of the method of the invention other geometries can likewise be devised.

The basic concept of an embodiment of a device according to the invention wherein the magnets are movable with respect to the containers is illustrated in Fig.1. The magnetic particles are in a liquid buffer contained in a vessel. The (aggregated) particles are
10 dragged through the liquid from left to right and v.v. by translating a set of at least two magnets arranged such that the magnetic field induced in the vessel changes polarity upon each movement of the magnets.

The method can be used with more containers and magnets. Thus the method and device according to the invention allow for batch-wise processing of several vessels
15 simultaneously. The method and device according to the invention are especially suitable for treating a large number of fluid volumes in each of their respective containers at the same time.

In a preferred embodiment of the device according to the invention the containers and the magnets are placed in intervening array geometries. This layout allows the use of the
20 method of the invention to give a high throughput format.

An embodiment wherein the containers and the magnets are placed in intervening array geometries is illustrated in fig.2. The vessels (e.g. Eppendorf cups, PCR containers or micro-titer plate strips) are placed in an array geometry with the magnets fixed to a
second array that translates with respect to the vessels.

25 In this way a large series of samples is processed simultaneously. Addition and aspiration of liquids may be by hand or by an automated multi-tip dispenser instrument as known in the art.

The method of the invention may also be used with a closed system. That is, a system
30 wherein the liquid, for example, is not contained in a vessel, but in a tube. Thus, with containers, as used with the method of the invention, not only containers used in batch wise processes are meant but also containers used in closed systems, such as tubes and the like. Such an alternative embodiment of a device according to the invention illustrated in figure 3. The particles and liquid are not contained in a vessel but in a tube, allowing
35 processing the particles in a closed system.

Depending on the exact intended use of a device of the present invention several modifications and variations on the above-described theme are possible. For example, the shape of the container may be modified and further modifications as to the location of
40 the magnets with respect to said containers can be made as well.

A device according to the present invention is especially suitable for use with methods for the purification of, for example, nucleic acid from biological starting material.

For a specific purpose the device can be further modified to match the intended use.

The adjustments may result in better ways for separating the particles from the liquid. The device may also be adjusted in such a way that it can be used with different sample fluid volumes.

- 5 In a preferred embodiment according to the invention the magnets can not only be moved with respect to the position of the containers but can also be moved in a direction along the walls of the containers (which would be vertical, when the containers are in an upright position).

- 10 In this way, the position of the magnets can be adjusted according to the volume of the fluid in the containers. Thus, when there is only a very small fluid volume to be mixed with the particles the magnet will be in a position that is lower than the position it will have when there is a larger volume of fluid in the same container.

- 15 The fact that the magnets can be moved in a vertical direction has the additional advantage that the magnets can now also be used to draw the particles to the lower part of the container, even when a bigger fluid volume is used. Thus, this allows the removal of a large part of the fluid volume, for example by a pipettor, while the magnet holds down the particles.

- 20 Optionally, the magnets, when they can be moved in a vertical direction along the walls of the containers, can also be used to draw the particles alongside the wall of the container till a position above the surface of the fluid. In that way the particles can be separated from the fluid and the remaining fluid may be removed from the container or, for example, be replaced by another fluid after which the particles may be drawn down below the liquid level and mixed with the new fluid using the magnets.

- 25 It is evident that the design of the device allows many variations in the methods of its use and all fall within the scope of the invention.

The use of the movement of the magnets in a vertical direction is illustrated in figure 4.

- 30 To allow the use of the device with a procedure involving the subsequent treatment of the particles with several liquids in different volumes and achieve an efficient mixing and separation of the particles with/from the respective fluids, adjustments can be made to the containers as well.

- 35 If a large container is used with a very small fluid volume the problem may arise that the particles can no longer be contacted with the fluid, simply because the fluid volume is more or less spread out over the bottom of the container and doesn't even cover the particles.

Thus, containers can be devised that can be used with different liquid volumes and still allow efficient mixing of the fluid volumes with the particles. Such containers and the use thereof are likewise part of the present invention.

- 40 To allow the use of fluids of considerable different volume a container can be used that comprises a part that is suitable for containing small fluid samples, while this part is connected to a part that is suitable for containing large volume samples. An example of such a container is illustrated in figure 4.

The multi-purpose container as depicted in figure 4 is provided with a tip with a relatively small diameter suitable for containing small volume samples, while the part on top of the tip is suitable for containing larger volume samples.

As indicated in figure 4 this container is suitable for using the device with small and large fluid volumes and the height of the magnets with respect to the container can be adjusted accordingly.

Moreover, the tip allows the collection of the particles from a large volume sample by moving the magnets in the downward orientation. The major part of the liquid can then be removed from the container without accidentally removing any of the particles.

A device according to the invention is especially suitable for use in a method for the isolation of nucleic acid from biological samples.

A typical method for the isolation of nucleic acid is the method as devised by R.Boom et al., as disclosed in EP 389063.

The "Boom method" involves the treatment of the biological material with a lysis buffer containing a chaotropic substance such as guanidine-isothiocyanate and a siliceous solid phase. The siliceous solid phase may be provided in the form of magnetic silica particles.

The nucleic acid released from the material by the lysis buffer will adhere to the (magnetic) siliceous particles. Thus, the particles and the biological material in the lysis buffer should be thoroughly contacted with each other, which is where the use of a device according to the method would come in. The particles with the nucleic acid adhered thereto can subsequently be separated from the remainder of the sample using a magnet (which can also be done with a device according to the invention provided that it is adapted for that purpose). Subsequently the nucleic acid containing particles should be

washed, which requires the mixing of the particles with a washing buffer. This is another function that may be performed by the device according to the invention. The particles are then removed from the washing liquid and contacted with an elution buffer (again, thorough contact between the particles and the elution buffer is required) and the nucleic acid is thus released from the particles into the elution buffer. In general, liquid volumes required for washing will be about 10 times larger than for elution. A typical volume for washing (per vessel per wash step) is 0.2-0.5 ml. The typical volume for elution buffer is 0.010/0.050ml

The embodiment of the device wherein the magnets can be moved in the vertical direction as well and containers are used that have a tip for the use of smaller liquid volumes is especially suitable for use with the so-called "Boom method" for the isolation of nucleic acid as described above.

When the device would be used with a method like the Boom method this can be performed with the following procedure:

A typical volume required for a washing step would be 0.2 to 0.5 ml, which is a relatively large volume. Therefore, during washing the magnetic particles are in the upper part of the vessel (level 1, fig.4 situation 1). However, for most applications the nucleic acid target needs to be concentrated in a buffer volume of typically 10 to 50µl. Such small

liquid volumes are hard to handle. It is difficult to control the size of such a small volume as well as to manipulate it in a vessel in combination with magnetic particles to form a suspension for performing bound-free steps.

Fig.4 shows a method that overcomes the above difficulties.

- 5 After completing the washing procedure the particles are captured at the side of the vessel wall (level 1, situation 1) and the wash liquid is aspirated with a pipetter tip. Next, the vessel is filled with fresh elution buffer (about 0.2ml) and the magnetic particles are transported down to the lower end of the vessel (level 3) by bringing the magnets down (situation 2). Transport of particles can be accelerated by translating the magnet
- 10 array as is done during washing as it moves downward. The composition of the ET buffer is such that no nucleic acid is released from the silica as long as the buffer temperature is not above RT.

Next, while aspirating, the tip is introduced into the vessel until its lower end is at a level that corresponds to the required volume of ET buffer (e.g. 10µl, see situation 3).

- 15 Next, a heat block is brought into contact with the vessel to heat up the temperature of the buffer to 55-60°C (situation 4)

Next, the actual elution procedure starts by translating the magnets horizontally as during the washing procedure, but now at level 3. Preferably, during elution, the heat block remains in contact with the vessel to keep the temperature of the elution buffer at 55-

20 60°C.

Finally, after completing the elution, the heat block is moved away from the containers

(down) and the magnets are moved up to level 2 (situation 5) to withdraw the particles

from the elution buffer that is now ready for further processing (amplification, sequencing,)

- 25 Preferably, in order to allow the heat block to contact the vessel during elution without disturbing the elution process (situation 4), the heat block has a special design that accounts for the dimensions of the magnetic array as well as for the shape of the vessel. The heat block preferably is produced from a material that is non-magnetic. For example, the heat block is produced from aluminum and contains a ceramic heater element as is known from the state of the art.

30

Thus, it is illustrated how the device can be used to automate and speed up existing procedures, that now have to be performed, either by hand or in more complicated automated devices.

- Of course, the use of a device according to the invention will find its application in many
- 35 biological assays or purification processes.

BRIEF DESCRIPTION OF THE FIGURES:

- Figure 1: The basic concept of an array according to the invention
- 40 Figure 2: Device wherein the holders for the containers and the magnets are placed in intervening array geometries and the magnets are placed in line in such a way that magnets of opposite polarities can be moved back and forth on straight

parallel paths along opposite sites of each container in such a way that the direction of the magnetic field in each container is repeatedly reversed.

Figure 3: Device wherein the containers are part of a closed system, e.g. a tube.


Figure 4: Device wherein the magnets can also be moved in a vertical direction so as to be positioned at different heights with respect to the walls of the containers and the containers are tube-shaped vessels provided with a tip for holding small liquid volumes.

5

Claims:

1. Method of mixing, in one or more container(s), magnetic or (super)paramagnetic particles with a fluid, using more than one magnets, whereby the containers are subjected to magnetic fields with different and changing directions by moving the magnets with respect to the position of the container(s) and/or by moving the containers with respect to the positions of the magnets, characterized in that the magnets and the holders for the containers are placed in intervening array geometries.
2. Method according to claim 1, wherein the containers, by moving either the containers or the magnets, are subjected to magnetic fields of opposite polarity.
3. Method according to claim 1 or 2, wherein, as a result of moving either the magnets or the containers, the containers are repeatedly moved between two magnets that face each other with the same pole.
4. Method according to any of claims 1-3, wherein the magnets are moved with respect to the position of the containers or the containers are moved with respect to the position of the magnets in such a way that the magnetic or (super)paramagnetic particles are moved through the fluid to one side of the container by bringing a first magnet with its magnetic pole close to the wall of the container and, subsequently are moved to the opposite side by bringing a second magnet close to the opposite wall of the container, whereby said second magnet has the same magnetic pole as the first magnet..
5. Method according to any of the preceding claims, wherein the magnets are moved with respect to the containers.
6. Device for mixing magnetic or (super)paramagnetic particles in one or more containers with a fluid, said device comprising means for holding said one or more containers and more than one magnets and means for moving said magnets with respect to the position of said containers and/or means for moving said containers with respect to the position of said magnets in such a way that the containers are subjected to magnetic fields with different and changing directions.
7. Device according to any of claims 1-6, the device being provided with a heat block that is positioned in such a way that it can be moved into close proximity with the containers so as to warm their contents, and moved away again.
8. Device according to claim 7, wherein the heatblock is positioned underneath the containers and has wells which enclose the tips of the containers when the heatblock is brought into close proximity with the containers.

Fig.1
Side view



Top view

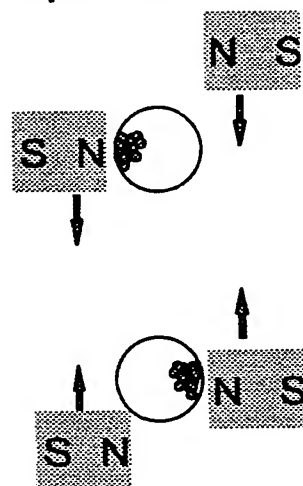


Fig.2

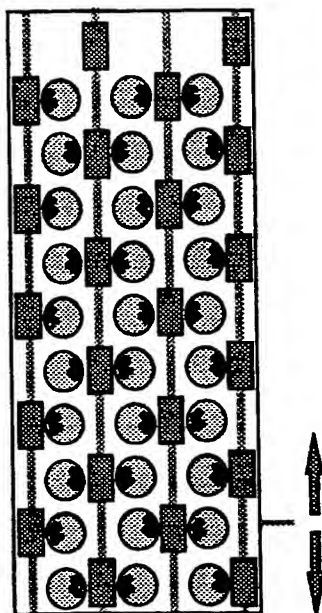


Fig.3

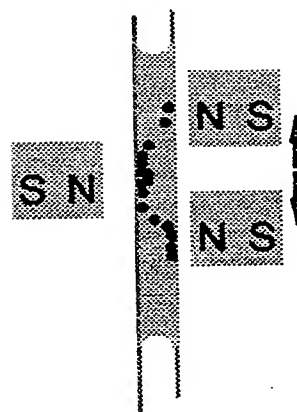
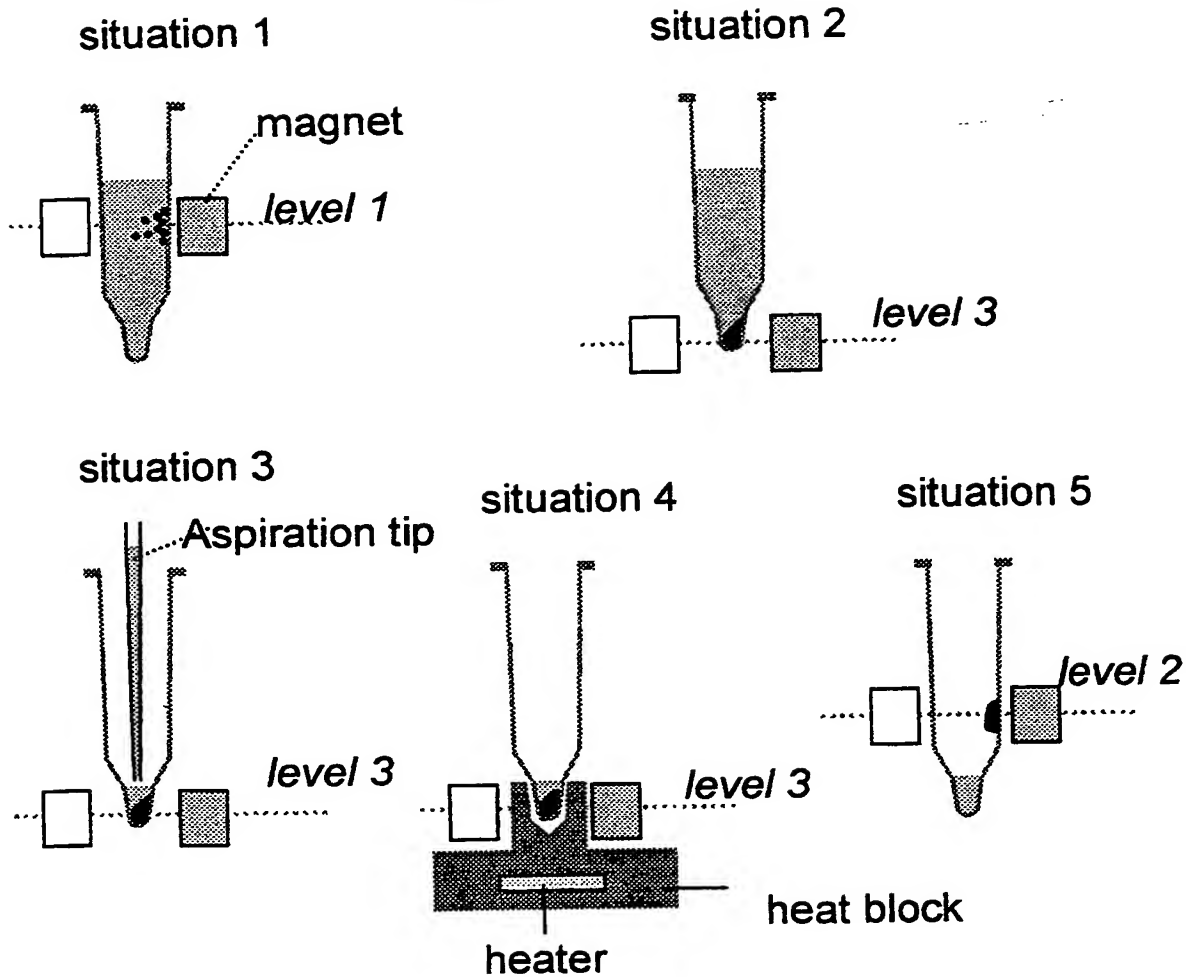


Fig.4

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 00/06789

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 B03C1/28 C12Q1/68

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B03C G01N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 96 26011 A (SIDDIQI IQBAL W) 29 August 1996 (1996-08-29) page 1, line 7 - line 12 page 2, line 13 - line 22 page 6, line 1 - line 17 page 14, line 18 - line 21 page 17, line 4 -page 18, line 26; claims 1,7,8,10,12-14,21; figures 3,4,7 -----	1-6,8

☐ Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

31 October 2000

Date of mailing of the international search report

07/11/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Decanniere, L

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 00/06789

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
W0 9626011 A	29-08-1996	AT 172890 T	15-11-1998
		AU 4927496 A	11-09-1996
		DE 69600924 D	10-12-1998
		DE 69600924 T	10-06-1999
		EP 0810905 A	10-12-1997
		JP 11500952 T	26-01-1999
		US 6033574 A	07-03-2000
<hr/>			